


1U Rack Mount Server Rackmount

Configuration Number: BASE CONFIG
SL-1U-MCX-C622SPW-LJ

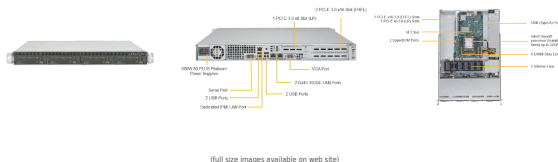

Type:

- 1U Rack Mount Server
- Depth: 25.60", Max Card Depth: 12.28"

Motherboard:

- Featuring Intel C622 Chipset and Intel Xeon Scalable Processors processor
- **Full Height Slots:**
 - 2 - PCIe x16
 - 1 - PCIe x8
- **LAN:** 2x Ports (10GbE)
- **RAID:** 0,1,5,10 via LSI MegaRAID
- **Video:** 1x VGA
- **Audio:** No Onboard Audio
- **Ports:**
 - 7x USB 2.0 Ports (2 Rear, 5 Internal Headers)
 - 4x USB 3.2 Gen 1 Ports (2 Rear, 2 Internal Headers)
 - 2x COM Ports (1 RS232 Rear, 1 RS232 Internal Headers)
- See specifications for more ports
- **Operating Temperature:** 0°C to 50°C (32°F to 122°F)

Configuration summary:

- **Processor:** Xeon Bronze 3104 - 1.70GHz Six Core Intel Processor - 8.25MB Cache (85W)
- **Memory:** 8GB DDR4 2666MHz ECC Registered RAM
- **Hard Drive:** 250GB NVMe SSD M.2 2.9GB/1.3GB - Samsung 980
- **Power Supply:** 600W High-Efficiency Power Supply w/PMBus 1.2, I2C, PFC, and Digital Switching

- **Operating System:** Not Included -
- **Warranty:** One-Year Depot Warranty

Technical Specifications

MotherBoard Specifications:

Motherboard Model

- Motherboard Type: Proprietary

Supported CPU

- Number of Processors: 1
- Processor Type: Intel Xeon Scalable Processors

Chipset

- Chipset: Intel C622 Chipset

Memory

- Memory Type: DDR4 2666MHz ECCR
- Memory Type: ECC Registered
- DIMMS: 6
- Maximum Memory: 192GB

On Board Audio

- Audio Type: No Onboard Audio

On Board Video

- Video Chipset: ASPEED AST2500 BMC
- Video on IO: 1x VGA
- VGA Port Out: 1

LAN

- LAN Ports: 2
- LAN Type: 10GbE
- LAN Chipset: Intel X722
- Second LAN Chipset: Intel X557
- Wireless LAN: No Integrated WLAN

Drive Interface

- SATA III Ports (6GB): 10
- RAID
- RAID Type: Software RAID
- RAID Levels Supported on Motherboard: 0, 1, 5, 10

M.2 Slot Specs

- Total M.2 NVMe SSD Slots: 1
- M.2 Slot #1 Specs
- M.2 SATA SSD
- PCIe Signal

Chassis Specifications:

General

- Form Factor: 1U Rackmount
- Color: Black & Silver
- Material: Steel & Plastic
- Material Thickness: 1mm
- Slide Rails: Included

Expansion

- Full Height Slots: 2
- Low Profile Slots: 1
- Max Card Depth: 12.28"
- 3.5" Hot Swap Bays: 4

Cooling System

- Maximum Fan Count: 6
- Included Fans: 4

Physical

- Depth: 25.60"
- Depth (Inches): 25.5
- Width: 17.20"
- Height: 1.70"
- Shipping Box - Depth: 33.70"
- Shipping Box - Width: 23.50"
- Shipping Box - Height: 8.50"
- Shipping Weight: 22lbs

Power

- Built-in Chassis Power Supply: 600W High-Efficiency Power Supply w/PMBus 1.2, I2C, PFC, and Digital Switching

- 22110 - 22 mm x 110 mm.
- 2280 - 22 mm x 80 mm.

Rear IO

- USB 2.0 Ports (on IO): 2
- USB 3.2 Gen 1 Type A Ports (on IO): 2
- Serial (Rear IO): 1

Headers

- USB 2.0 Ports (on Headers): 5
- USB 3.2 Gen 1 Ports (on Headers): 2
- Serial (via Headers): 1
- DOM
- Chassis Intrusion

Management Features

- NMI
- Watch Dog
- TPM Support: Via 2.0 Header

Environmental

- Operating Temperature: 0°C to 50°C (32°F to 122°F)
- High Humidity: 90%
- Low Humidity: 8%

Operating System Support

- Windows 10 Pro (64-Bit)
- Windows 10 Pro WS (64-Bit)
- Windows 10 IoT Ent 2019 LTSC
- SL-Windows 11PRO to 10PRO 64bit
- Ubuntu Server Edition
- Windows Server 2012
- Windows Server 2016 STD
- Windows Server 2019 Std
- RED HAT Enterprise LINUX SERVER BASIC
- RED HAT Enterprise LINUX WORKSTATION STANDARD
- RED HAT Enterprise LINUX SERVER STANDARD

Compliance of Component

- CE
- RoHS
- FCC

Warranty of Component

- Motherboard Warranty: 1 Year

Other Features

- Other Features:
 - PCI-E
 - 1 PCI-E 3.0 x8 (in x16 slot),
 - 1 PCI-E 3.0 x32 Left Riser Slot

M.2

- M.2 Interface:
PCI-E 3.0 x4 and SATA
- Form Factor:
2280, 22110
- Key: M-Key
- Double Height
Connector



www.superlogics.com
Phone: 1-508-650-9500

sales@superlogics.com
Fax: 1-508-650-9525