
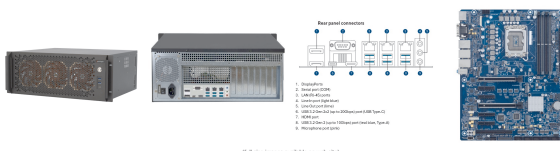


4U Rack Mount Industrial PC Rackmount

Configuration Number: BASE CONFIG
SL-4U-LLQ870A-SR

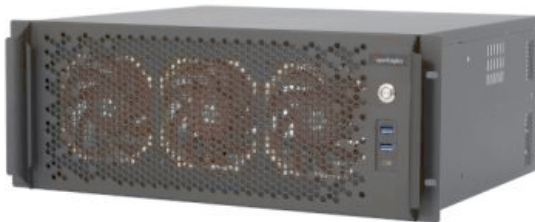

Type:

- 4U Rack Mount Industrial PC
- Depth: 14.89", Max Card Depth: 324mm"

Motherboard:

- Featuring Intel Q870 Chipset and Intel Core™ Ultra Processors (Series 2), LGA1851 processor
- **Full Height Slots:**
 - 2 - PCIe x16
 - 4 - PCIe x4
 - 1 - PCI
- **LAN:** 3x Ports (2.5GbE + 2.5GbE + 1GbE)
- **RAID:** 0,1 and NVMe 0,1
- **Video:** 2x DisplayPort, 1x HDMI
- **Audio:** Realtek ALC897
- **Ports:**
 - 2x USB 2.0 Ports (2 Internal Headers)
 - 4x USB 3.2 Gen 1 Ports (2 Front, 2 Internal Headers)
 - 6x USB 3.2 Gen 2 Ports (6 Rear)
 - 6x COM Ports (1 RS232 Rear, 4 RS232 Internal Headers, 1 RS232/422/485 Internal Headers)
 - 1x Parallel Port (Headers)
- See specifications for more ports
- **Operating Temperature:** 0°C to 60°C (32°F to 140°F)

Configuration summary:

- **Processor:** Intel Core™ Ultra 5 Processor 225 Processor - 10 Cores (6P + 4E), 20MB Intel Smart Cache, 121W (PL2)
- **Memory:** 16GB DDR5 4800MHz RAM Non-ECC Unbuffered DIMM
- **Hard Drive:** 500GB M.2 2280 NVMe SSD

or greater 5,000/3,000MB/s

- **Power Supply:** 550W Fully Modular ATX Power Supply - 80+ Bronze
- **Operating System:** Not Included -
- **Warranty:** One-Year Depot Warranty

Technical Specifications

MotherBoard Specifications:

Motherboard Model

- Motherboard Type: ATX
- Long Production Cycle

Supported CPU

- Number of Processors: 1
- Processor Type: Intel Core™ Ultra Processors (Series 2), LGA1851

Chipset

- Chipset: Intel Q870 Chipset

Memory

- Memory Type: DDR5 4800MHz
- Memory Type: Non-ECC
- DIMMS: 4
- Maximum Memory: 192GB

On Board Audio

- Audio Type: Realtek ALC897

On Board Video

- Video Chipset: Supported by CPU - depends on CPU selected
- Video on IO: 2x DisplayPort, 1x HDMI
- Display Port Out: 2
- HDMI Out: 1

LAN

- LAN Ports: 3
- LAN Type: 2.5GbE + 2.5GbE + 1GbE
- LAN Chipset: Intel 2.5Gb Ethernet
- Second LAN Chipset: Intel 2.5Gb Ethernet
- Third LAN Chipset: Intel i210AT
- Wireless LAN: No Integrated WLAN

Drive Interface

- SATA III Ports (6GB): 4
- RAID

Chassis Specifications:

General

- Form Factor: 4U Rackmount
- Front Changeable Air Filter
- Color: Black
- Material: Metal/Steel
- Material Thickness: 1mm
- Motherboard Compatibility: SSI CEB
- Redundant Power Supply Capable
- Slide Rails: Optional

Expansion

- Full Height Slots: 8
- Max Card Depth: 324mm"

Front Ports

- USB 3.2 Ports (Front): 2
- USB Type-C (Front): 1

Cooling System

- Maximum Fan Count: 3

Physical

- Depth: 14.89"
- Width: 17"
- Height: 6.96"
- Shipping Box - Depth: 21"
- Shipping Box - Width: 19"
- Shipping Box - Height: 11"
- Shipping Weight: 28lbs

Other Features

- Features:
 - 8x full height PCIe card slot cutouts
 - Maximum card height: 158mm (card and power connector must be ≤158mm tall)
 - Maximum card length: 324mm (with 25mm thick front fans)
 -

- RAID Type: Software RAID
- RAID Levels Supported on Motherboard: 0, 1, 5, 10

Expansion Slots

- PCI Express x16 Slots On Motherboard: 2
- PCI Express x4 Slots On Motherboard: 4
- PCI Slots (Conventional 32-Bit): 1

M.2 Slot Specs

- Total M.2 NVMe SSD Slots: 2
- M.2 Slot #1 Specs
 - 2242 - 22 mm x 42 mm.
 - 2260 - 22 mm x 60 mm.
 - 2280 - 22 mm x 80 mm.
- M.2 Slot #2 Specs
 - 2280 - 22 mm x 80 mm.
- M.2 E-Key Slot
 - 2230 - 22 mm x 30 mm.

Rear IO

- USB 3.2 Gen 2 Type A Ports (on IO): 6
- USB 3.2 Gen 2x2 Type C Ports (on I/O): 1
- Serial (Rear IO): 1
- Audio on IO

Headers

- USB 2.0 Ports (on Headers): 2
- USB 3.2 Gen 1 Ports (on Headers): 4
- USB 2.0 Ports (Type A): 1
- Serial (via Headers): 4
- Serial 232/422/485 Ports: 1
- Parallel Ports: 1
- FAN Connectors: 4
- Audio on Headers
- PS/2 Combo (Mouse/Keyboard) on Headers
- Chassis Intrusion
- TPM Support: Via 2.0 Header

Environmental

- Operating Temperature: 0°C to 60°C (32°F to 140°F)
- High Humidity: 95%
- Low Humidity: 10%

Operating System Support

- Windows 11 Home (64 Bit)
- Windows 11 Pro (64 Bit)
- Windows 11 Pro for WS (64 Bit)
- Windows 11 IoT 2024 LTSC Value
- Windows 11 IoT 2024 LTSC High End
- RED HAT Enterprise LINUX WORKSTATION STANDARD

- LIQUID COOLING NOTE: radiators reduce the available depth inside the case for long GPUs
- Inside of case is 349mm deep
- Thickness of radiator + thickness of case fans + GPU length must equal less than 349mm total.
- Chassis Warranty: 1 Year

- RED HAT Enterprise LINUX SERVER BASIC
- RED HAT Enterprise LINUX SERVER STANDARD
- LINUX Ubuntu Desktop
- Ubuntu Server Edition

Compliance of Component

- CE
- FCC

Other Features

- Features:

Expansion slots

1x PCI Express 5.0 x16 slot (1 x16 mode / 2 x8 modes)

1x PCI Express 4.0 x4 slot (x2 mode, open slot)

1x PCI Express 4.0 x4 slot (x4 mode, open slot)

1x PCI Express 5.0 x16 slot (x8 mode)

1x PCI Express 4.0 x4 slot (x2 mode, open slot)

1x PCI Express 4.0 x4 slot (x4 mode, open slot)

1x PCI slot

M.2 Slots

1x M.2 socket 1 (Key E, 2230) for WiFi/BT devices
Supporting Intel CNVi

1x M.2 socket 3 (Key M, 2242/2260/2280) with
PCIe 5.0 x4 mode supporting NVMe

1x M.2 socket 3 (Key M, 2280) with PCIe 4.0 x4
mode supporting NVMe

- Motherboard Warranty: 1 Year



www.superlogics.com
Phone: 1-508-650-9500

sales@superlogics.com
Fax: 1-508-650-9525