


## 2U Rack Mount Server Rackmount

Configuration Number: BASE CONFIG  
SL-2U-MCX-C622SPW-LD

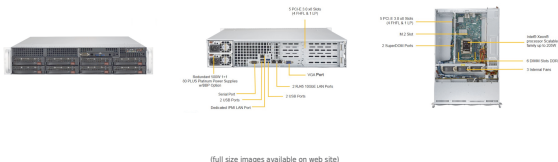

### Type:

- 2U Rack Mount Server
- Depth: 25.60", Max Card Depth: 13"

### Motherboard:

- Featuring Intel C622 Chipset and Intel Xeon Scalable Processors processor
- **Full Height Slots:**
  - 1 - PCIe x8
  - 4 - PCIe x4
- **LAN:** 2x Ports (10GbE)
- **RAID:** 0,1,5,10
- **Video:** 1x VGA
- **Audio:** No Onboard Audio
- **Ports:**
  - 7x USB 2.0 Ports ( 2 Rear, 5 Internal Headers )
  - 4x USB 3.2 Gen 1 Ports ( 2 Front, 2 Rear )
  - 2x COM Ports (1 RS232 Rear, 1 RS232 Internal Headers)
- See specifications for more ports
- **Operating Temperature:** 10°C to 35°C (50°F to 95°F)

### Configuration summary:

- **Processor:** Xeon Bronze 3104 - 1.70GHz Six Core Intel Processor - 8.25MB Cache (85W)
- **Memory:** 8GB DDR4 3200MHz ECC Registered RAM
- **Hard Drive:** 500GB M.2 2280 NVMe SSD or greater 5,000/3,000MB/s
- **Power Supply:** 500W high-efficiency redundant power supplies with PMBus 80+ Platinum
- **Operating System:** Not Included -

- **Warranty:** One-Year Depot Warranty

# Technical Specifications

## MotherBoard Specifications:

### Motherboard Model

- Motherboard Type: Proprietary

### Supported CPU

- Number of Processors: 1
- Processor Type: Intel Xeon Scalable Processors

### Chipset

- Chipset: Intel C622 Chipset

### Memory

- Memory Type: DDR4 2400MHz ECCR
- Memory Type: ECC Registered
- DIMMS: 6
- Maximum Memory: 192GB

### On Board Audio

- Audio Type: No Onboard Audio

### On Board Video

- Video Chipset: ASPEED AST2500 BMC
- Video on IO: 1x VGA
- VGA Port Out: 1

### LAN

- LAN Ports: 2
- LAN Type: 10GbE
- LAN Chipset: Intel X722
- Second LAN Chipset: Intel X557
- Wireless LAN: No Integrated WLAN

### Drive Interface

- SATA III Ports (6GB): 10

### M.2 Slot Specs

- Total M.2 NVMe SSD Slots: 1
- M.2 Slot #1 Specs
- M.2 SATA SSD
- PCIe Signal
- 22110 - 22 mm x 110 mm.
- 2280 - 22 mm x 80 mm.

### Rear IO

- USB 2.0 Ports (on IO): 2

## Chassis Specifications:

### General

- Form Factor: 2U Rackmount
- Color: Black
- Material: Steel & Plastic
- Material Thickness: 1mm
- Redundant Power Supply Capable
- Slide Rails: Optional

### Expansion

- Full Height Slots: 4
- Low Profile Slots: 1
- Max Card Depth: 13""
- 3.5" Hot Swap Bays: 8

### Front Ports

- USB 3.2 Ports (Front): 2

### Cooling System

- Maximum Fan Count: 3
- Included Fans: 3

### Physical

- Depth: 25.60"
- Width: 17.20"
- Height: 3.50"
- Shipping Box - Depth: 34"
- Shipping Box - Width: 26.50"
- Shipping Box - Height: 11"
- Shipping Weight: 60lbs

### Power

- Built-in Chassis Power Supply: 500W high-efficiency redundant power supplies with PMBus 80+ Platinum

- USB 3.2 Gen 1 Type A Ports (on IO): 2
- Serial (Rear IO): 1

#### **Headers**

- USB 2.0 Ports (on Headers): 5
- USB 3.2 Gen 1 Ports (on Headers): 2
- Serial (via Headers): 1

#### **Management Features**

- TPM Support: Via 2.0 Header

#### **Environmental**

- Operating Temperature: 10°C to 35°C (50°F to 95°F )
- High Humidity: 90%
- Low Humidity: 8%

#### **Operating System Support**

- Windows 10 Pro (64-Bit)
- Windows 10 Pro WS (64-Bit)
- Windows 10 IoT Ent
- Windows 10 IoT Ent 2019 LTSC
- SL-Windows 11PRO to 10PRO 64bit
- LINUX Ubuntu Workstation
- Ubuntu Server Edition
- Windows Server 2012
- Windows Server 2016 STD
- Windows Server 2019 Std
- RED HAT Enterprise LINUX SERVER STANDARD

#### **Compliance of Component**

- CE
- RoHS
- FCC

#### **Warranty of Component**

- Motherboard Warranty: 1 Year

#### **Other Features**

- Other Features:  
PCI-Express
  - 4 PCI-E 3.0 x8 (FHFL) slots
  - 1 PCI-E 3.0 x8 (LP) slot



Simplifying Computing™

www.superlogics.com  
Phone: 1-508-650-9500

sales@superlogics.com  
Fax: 1-508-650-9525